

Qadvanced Roller Shade Remote ZigBee HA1.2 Programming Instructions




Lower Limit Position must be set prior to using the **PRESET** positions (20%, 40%, 60%, 80%). These positions are based on the Lower Limit Position of the shade. When learning new positions, the button currently being programmed (after Step 3. TUG) will not send commands to the shade. After Step 5 all buttons resume full functionality.

Example 1: When learning a new Upper Limit Position, the **UP** button is semi-disable. Only by pressing the **UP** button 3 times will the shade move to the up position (or manually roll the shade up by hand).

Example 2: When learning a new Lower Limit Position, the **DOWN** button is disabled. The shade can still be adjusted using the **UP** button (or manually roll the shade by hand).

SETTING UPPER AND LOWER LIMITS / LEARNING A NEW POSITION

1. **PRESS** and **RELEASE** the (**UP**, **DOWN**, or **PRESET**) button that will be programmed
(Shade will move to selected position)
2. **PRESS** and **HOLD** the same (**UP**, **DOWN**, or **PRESET**) button **UNTIL** the shade **JOGS**
3. **TUG** shade **6-10 inches** (Shade will JOG in response)
4. **ADJUST** shade to desired position (Manually roll shade by hand if necessary)
5. **PRESS** and **HOLD** the same (**UP**, **DOWN**, or **PRESET**) button (Shade will JOG when learned)

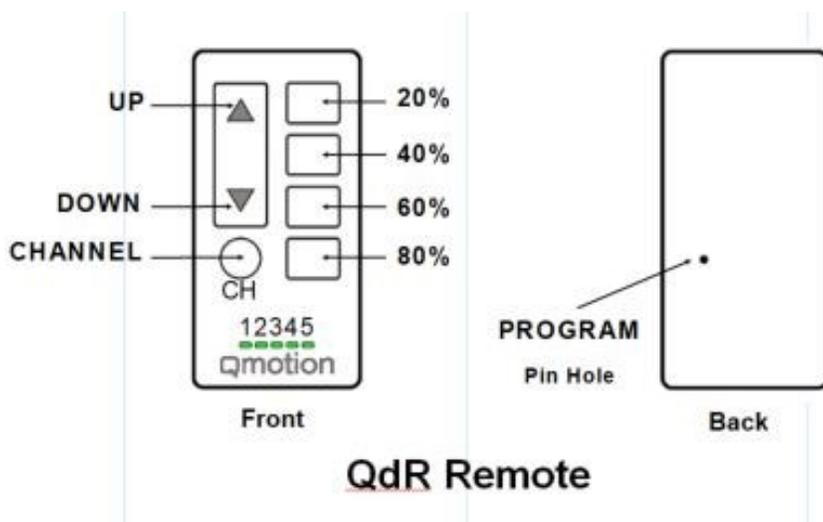

UNLEARN A REMOTE FROM SHADE

(Shade must be at Upper Limit)

1. Use a paperclip to **PRESS** the **PROGRAM** button on back of the remote
2. **PRESS** and **RELEASE** the **DOWN** button
(Shade will JOG in response)
3. **TUG** the shade **6-10 inches**
(Shade will JOG and move to the Upper Limit)

REMOVE REMOTE FROM NETWORK

1. Use a paperclip to **PRESS** the button on the back of the remote three times quickly.
2. When the lights stop growing, the remote has been removed from the network.

To expose the battery cover, TUG shade past the lower limit-shade will travel up to 75%. Then UNROLL shade down to expose battery cover.

BATTERY REPLACEMENT

1. **PRESS** and **RELEASE** the **DOWN** button to unroll shade
2. **UNROLL** the **FABRIC ROLL TUBE** to expose the battery cover (See **IMPORTANT** information above)
3. **REMOVE BATTERY COVER**
4. **REPLACE** batteries with **NEW D-CELL or AA** Alkaline batteries
5. **INSTALL BATTERY COVER**
6. **PRESS** and **RELEASE** the **UP** button to roll fabric back onto tube